



2025

CATALOG #66 EFFECTIVE OCTOBER 2024



NEW PRODUCT

1" POLY DRY FIT™

FEATURES

- Double poly-ball valves with integrated quick disconnect.
- 1" full-port (unrestricted flow)
- Allows high pressures and flow
- Economical and simpler design without handle locking feature
- 90% less spillage vs. 2 standard valves connected via a coupling.



1" POLY DRY FIT™					
PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY
DF100A	1" MALE X FPT NPT WFKM SEALS	100	1"	1"	1
DF100D	1" FEMALE X FPT NPT WFKM SEALS	100	1"	1"	1



RETURNING PRODUCTS

VALVE & REPAIR KITS & HANDLES

PART NO	DESCRIPTION	QTY
CV100V	1" FEMALE X FEMALE NPT CHECK	1
MCV100V	1" MANIFOLD CHECK VALVE	1
V10200	KIT FOR V100FP, V125, MY1000CF	1
V20200	KIT FOR V125FP, V150, V200	1
V20303TS	T HANDLE FOR V125SL, V150SL	1
V25200	KIT FOR MV220CF, V200FP, V204FP, V200FP, VFM220FP, VFM204FP	1
V25200BL	KIT FOR MV220BL, MV220SL, V200SL	1
V30200	KIT FOR MV300, V300	1
V35200	KT FOR MV300CF, V300FP	1
V40200	KIT FOR V400	1
V4200150	2" FEMALE NPT X 1 1/2" NOZZLE	1
V530200	KIT FOR MV5F300, MYSMT300, MV5300CF	1
V5505200	KIT FOR V55050	1
V5510200	KIT FOR V55100	1
V5515200	KIT FOR V55150	1
V5525200	KIT FOR V5FMT220SS, V55200	1
V5535200	KIT FOR V55300	1

PUMPS

PART NO	DESCRIPTION	HP	QTY	SKID QTY
12049F	HYDRAULIC PEDESTAL HOUSING	N/A	1	N/A
17049A	HYDRAULIC ADAPTER	N/A	1	N/A
200PHA	2" CAST IRON HYDRAULIC W/O MOTOR	N/A	1	N/A
333POICF	3" CAST IRON PUMP ONLY WITH 3/4" SHAFT & 5 VANE IMPELLER UNASSEMBLED FOR 215TC FRAME	N/A	1	6
BE1M10-100	10 HP ELECTRIC MOTOR, 1" SHAFT DIAMETER 3 PHASE	10	1	N/A
BE1M10-100	10 HP SINGLE PHASE WITH 1" SHAFT	10	1	N/A
BE1M15	15 HP, 215TC, 3PH	15	1	N/A
BE1M15-100	15 HP MOTOR WITH 1" DIAMETER SHAFT	15	1	N/A
BE1M5	CM0613T, 5HP, 184TC, 3PH	5	1	N/A

GASKETS

PART NO	DESCRIPTION	SOLE SIZE	FITS POLY	RTS SS	LOT QTY
TF100G	1" & 1/2" POLY BULKHEAD EPDM GASKET	2 1/2"	TF100 & TF125	TF100SS & TF125SS	25
TF100GV	1" & 1/2" POLY BULKHEAD FM GASKET	2 1/2"	TF100 & TF125	TF100SS & TF125SS	10

PIPE FITTINGS

PART NO	DESCRIPTION	MAX PSI	LOT QTY
CR025	1/2" POLY CROSS	300	10BAG
CR038	3/8" POLY CROSS	300	10BAG
HB038-025	3/8" MALE THREAD X 1/2" HOSE BARB	300	10BAG
HBF100-040	1" FEMALE THREAD X 1" 90 HOSE BARB	300	10BAG
HB1025	1/4" HOSE BARB TEE	300	10BAG
HB1050-038	1/2" X 3/4" HOSE BARB TEE	300	10BAG
NIP400-04SH	4" SHORT POLY NIPPLE	300	1
RB050-018	1/2" MNPT X 1/2" FNPT REDUCER BUSHING	300	10BAG
RB100-018	1" MNPT X 1/2" FNPT REDUCER BUSHING	300	10BAG
RB125-038	1" X 3/4" FPT REDUCING BUSHING	300	10BAG

MANIFOLD

PART NO	DESCRIPTION	MAX PSI	LOT QTY
M100125HBT	1" FLANGE X 1 1/4" HOSE BARB TEE	300	10
M10105A	1" FULL PORT FLANGE X 1" PVC GLUE SOCKET FITTING	300	10
M200THB100	2" MANIFOLD T X 1" HOSE BARB	150	1
M201TEEV075	2" STANDARD VENTURIT W/ 3/4"	200	1
M220150HBT	1 1/2" HOSE BARB X 1 1/2" HOSE BARB	300	10
M220SWP90	2" FULL PORT FLANGE X FLANGE SWEEP	300	10
M220SWP60	2" FULL PORT FLANGE X FLANGE SWEEP 1/4" PORT	300	1
M221SWP90	2" FULL PORT MANIFOLD 90° SWEEP	300	1
MLSTM100-80	1" MANIFOLD MINI T STRAINER 80 MESH	300	1
MLSTM100HBC	1" MANIFOLD MINI T STRAINER HEAD & BOWL	N/A	1
MLSTM100HBC	1" MANIFOLD MINI T STRAINER HEAD & CLEAR BOWL	N/A	1
MTF100BD	1" FLANGE X 1" FEMALE THREAD W/EPDM GASKET	300	10

1 1/2" LSQ STRAINERS

PART NO	DESCRIPTION	MAX PSI	LOT QTY
LSS300-C	3" STAINLESS STEEL LINE CAP	N/A	1
LST220SS	20 MESH SS SCREEN	N/A	1
LSQ15A-B/C	1 1/2" X 1 1/2" LSQ STRAINER BODY/CAP	N/A	1
LSQ200-G/V	2" FM GASKET	N/A	1

FEATURES

MANIFOLD FLANGE CONNECTIONS

3 WAY BOTTOM LOAD BALL VALVES

FEATURES

- Stainless steel bolts
- Precision molded in fiberglass reinforced polypropylene for additional strength
- Self-aligning ball moves freely against the PTFE seats for smooth operation
- Ball is diamond turned after molding to make it spherically perfect, which provides precise contact between ball and seats
- PTFE self-lubricating stem bushings and seats
- FKM body seals
- Directional flow, right or left. Valve can be turned off to stop flow

REPAIR KIT INCLUDES:

- Ball
- Body gasket
- Thrust washer
- Ball seals
- Upper stem bushing
- Stem O-ring

3 WAY SIDE LOAD BALL VALVES

FEATURES

- Stainless steel bolts
- Precision molded in fiberglass reinforced polypropylene for additional strength
- Self-aligning ball moves freely against the PTFE seats for smooth operation
- Ball is diamond turned after molding to make it spherically perfect, which provides precise contact between ball and seats
- PTFE self-lubricating stem bushings and seats
- FKM body seals
- Directional flow, right or left. Valve cannot be turned off to stop flow



MV300BL

3 WAY BOTTOM LOAD MANIFOLD VALVES

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	LOT QTY	HANDLE TYPE	REPLACEMENT HANDLE	REPAIR KIT
MV100BL	1" FP 3-WAY BOTTOM LOAD MANIFOLD VALVE	300	1"	1"	6	T	V10353TB	N/A
MV200BL	2" SP 3-WAY BOTTOM LOAD MANIFOLD VALVE	225	2"	1 1/2"	6	T	V20353TB	V15300SL
MV220BL	2" FP 3-WAY BOTTOM LOAD MANIFOLD VALVE	150	2"	2"	8/BOX	STRAIGHT	V25353B	V25200BL
MV300BL	3" FP 3-WAY BOTTOM LOAD MANIFOLD VALVE	150	3"	3"	4/BOX	STRAIGHT	V25353B	V35200BL



MV100SL

MV200SL

MV220SL

3 WAY SIDE LOAD MANIFOLD VALVES

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	LOT QTY	HANDLE TYPE	REPLACEMENT HANDLE	REPAIR KIT
MV100SL	1" FP 3-WAY SIDE LOAD MANIFOLD VALVE	300	1"	1"	6	T	V10353TB	N/A
MV200SL	2" SP 3-WAY SIDE LOAD MANIFOLD VALVE	225	2"	1 1/2"	5	STRAIGHT	V20153SH	V15300SL
MV220SL	2" FP 3-WAY SIDE LOAD FULL PORT MANIFOLD VALVE	100	2"	2"	8/BOX	STRAIGHT	V25153SH	V25200BL

MANIFOLD FLANGE CONNECTIONS

PRESSURE SPIKE VALVES

FEATURES

- FKM seals.
- Precision molded polypropylene is reinforced with fiberglass for additional strength.
- 360° orientation
- Preset pressure spring



MANIFOLD PRESSURE SPIKE VALVES

PART NO	DESCRIPTION	CRACKING PRESSURE	MAX PSI	QTY
MPRV100-050	1" X 1" MANIFOLD PRESSURE SPIKE VALVE	50	300	1
MPRV100-075	1" X 1" MANIFOLD PRESSURE SPIKE VALVE	75	300	1
MPRV100-100	1" X 1" MANIFOLD PRESSURE SPIKE VALVE	100	300	1
MPRV100-125	1" X 1" MANIFOLD PRESSURE SPIKE VALVE	125	300	1

DRY-MATE™ DRY-DISCONNECTS

FEATURES

- Easy to use
- Minimal fluid spillage
- Reduces risk of exposure
- Wide range of chemical resistance
- When properly installed and operated, the assembly will not accidentally separate while fluid is flowing; preventing costly mishaps.
- Spillage data: 2"=4ml, 3"=15ml

REPAIR KIT INCLUDES:

- Face seal
- Ball
- Seats
- Body gasket
- Thrust bearings
- Stem bushings



MANIFOLD DRY DISCONNECTS

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY	REPLACEMENT HANDLE	REPAIR KIT
DM200ACF	2" MALE MANIFOLD DRY-MATE WITH FKM SEALS	100	2"	1 1/4"	1	DM20153M	DM20200A
DM200DCF	2" FEMALE MANIFOLD DRY-MATE WITH FKM SEALS	100	2"	1 1/2"	1	DM20153F	DM20200D
DM300ACF	3" MALE MANIFOLD DRY-MATE WITH FKM SEALS	150	3"	3"	1	DM30153M	DM30200
DM300DCF	3" FEMALE MANIFOLD DRY-MATE WITH FKM SEALS	150	3"	3"	1	DM30153F	DM30200

Note: Male and female sold separately

MANIFOLD FLANGE CONNECTIONS

BOTTOM DRAIN BOLTED TANK FITTINGS

FEATURES

- Stainless steel bolts
- Bolt head plugs sealed ultrasonically
- Glass reinforced polypropylene
- EPDM gasket standard
- FKM gasket available



BOTTOM DRAIN BULKHEAD FITTINGS

FEATURES

- Glass reinforced polypropylene
- EPDM standard
- Groove allows more drainage
- Gasket not included



BOLTED TANK FITTINGS


FEATURES

- Stainless steel bolts
- Bolt head plugs sealed ultrasonically
- Glass reinforced polypropylene
- EPDM gasket standard
- FKM gasket available



**MAX WALL THICKNESS
CHART ON PAGE 160**

NOT YOUR TYPICAL SPILLAGE

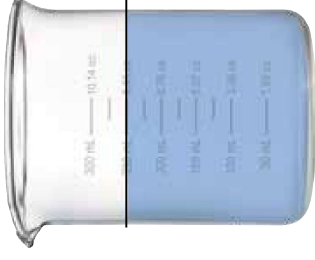

STANDARD 2" VALVE



2" DRY-MATE

99% SPILLAGE REDUCTION

- Reduction of typical spillage using standard 2" valve with cam lock connection vs. Dry-Mate
- 8.45 oz. (250 mL) vs. 0.1 oz. (3 mL) spillage
- At five disconnections per day, this is **over 118 gallons (450 liters) saved per year**; enough to fill the gas tanks of eight mid-size automobiles

DRY DISCONNECTS

FEATURES



SAFETY FIRST

Product is important, but the safety of your team is essential. With Dry-Mate Dry-Disconnects, leakage from disconnecting is miniscule compared to standard valves. When properly installed and operated, the danger posed by harmful chemicals contacting your team is greatly reduced.



EVERY DROP COUNTS

Your product is money. Why waste money in spilling your product every time you disconnect? With Dry-Mate, your spillage amount will be significantly reduced. At 3 mL product spillage for a 2" line, you can have peace of mind that your product is being placed where it should be and not on the ground.



PRODUCT ONLY WHERE YOU WANT IT

When a Dry-Mate is properly installed and operated, the assembly will not accidentally separate while fluid is flowing; preventing costly mishaps.



DITCH THE MAINTENANCE


All that spillage has to go somewhere. If you are collecting large areas of spillage run-off, you have to have it pumped out. Reduce your maintenance costs on your spillage pits by keeping fluids contained.

DRY DISCONNECTS

1½" POLY DRY-MATES

FEATURES

- Lightweight
- Easy to use
- Economical
- Reduces risk of exposure
- Wide range of chemical resistance
- Unrestricted 1½" flow
- Patented double ball design with cam lever connection
- When properly installed and operated, the assembly will not accidentally separate while fluid is flowing, preventing costly mishaps
- Spillage data: 1½" = 2ml



REPAIR KIT INCLUDES:

- Ball
- Body gasket
- Thrust washer
- Ball seats
- Upper stem bushing
- Stem o-ring




DRY DISCONNECTS

2" POLY DRY-MATES


FEATURES

- Lightweight
- Easy to use
- Economical
- Reduces risk of exposure
- Wide range of chemical resistance
- Unrestricted 1½" flow
- Patented double ball design with cam lever connection
- When properly installed and operated, the assembly will not accidentally separate while fluid is flowing, preventing costly mishaps
- Spillage data: 2" = 2.6ml



REPAIR KIT INCLUDES:

- Ball
- Body gasket
- Thrust washer
- Ball seats
- Upper stem bushing
- Stem o-ring

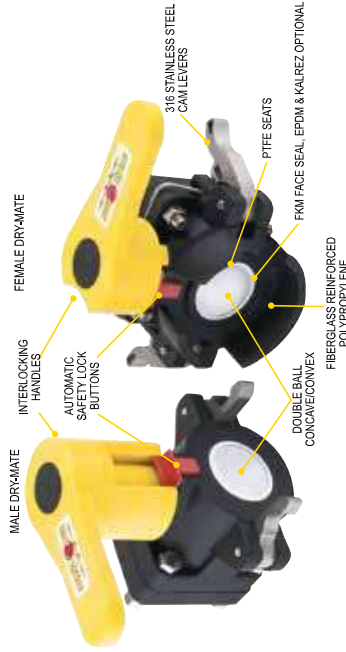


1½" POLY MALE DRY-MATE

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY
DM150A	1½ MALE X FPT NPT WFKM SEALS	100	1½	1½	1
DM150AB	1½ MALE X FPT BSP WFKM SEALS	100	1½	1½	1
DM150AE	1½ MALE X FPT NPT WEPDM SEALS	100	1½	1½	1

1½" POLY FEMALE DRY-MATE

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY
DM150D	1½ FEMALE X FPT NPT WFKM SEALS	100	1½	1½	1
DM150DB	1½ FEMALE X FPT BSP WFKM SEALS	100	1½	1½	1
DM150DE	1½ FEMALE X FPT NPT WEPDM SEALS	100	1½	1½	1

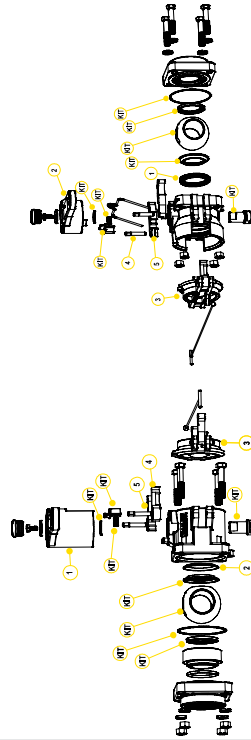


REPLACEMENT PARTS MALE

ITEM	PART NO	DESCRIPTION	QTY
1	DM20153M	MALE HANDLE	1
2	DB20153M	LOW PROFILE HANDLE	1
2	DB20295	FKM FACE SEAL	1
2	DB20295	EPDM FACE SEAL	1
2	DM20296	KALREZ® FACE SEAL	1
3	DM2000AP	DUST CAP	1
4	DM20300	PROFILE INSERT	2
5	200P	PIN	2
KIT	DM20200A	REPAIR KIT FOR DM150A	1

REPLACEMENT PARTS FEMALE

ITEM	PART NO	DESCRIPTION	QTY
1	DM20294A	FKM FACE SEAL	1
1	D20295A	EPDM FACE SEAL	1
1	DM20296	KALREZ® FACE SEAL	1
2	DM20153F	FEMALE HANDLE	1
3	DM200PL	DUST PLUG	1
4	200P	PIN	2
5	DM200KX	CAM ARM	2
KIT	DM20200D	REPAIR KIT FOR DM150D	1

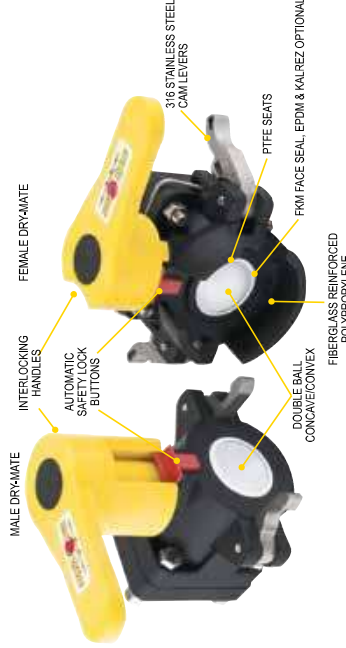


2" POLY MALE DRY-MATE

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY
DM200A	2" MALE X FPT NPT WFKM SEALS	100	2"	1½	1
DM200AB	2" MALE X FPT BSP WFKM SEALS	100	2"	1½	1
DM200AE	2" MALE X FPT NPT WEPDM SEALS	100	2"	1½	1
DM200AT	2" MALE X FPT NPT WFKALREZ® SEALS	100	2"	1½	1
DM20201A	2" MALE X MALE NPT W/LOW PROFILE HANDLE	100	2"	1½	1

2" POLY FEMALE DRY-MATE

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY
DM200D	2" FEMALE X FPT NPT WFKM SEALS	100	2"	1½	1
DM200DB	2" FEMALE X FPT BSP WFKM SEALS	100	2"	1½	1
DM200DE	2" FEMALE X FPT NPT WEPDM SEALS	100	2"	1½	1
DM200DT	2" FEMALE X FPT NPT WFKALREZ® SEALS	100	2"	1½	1

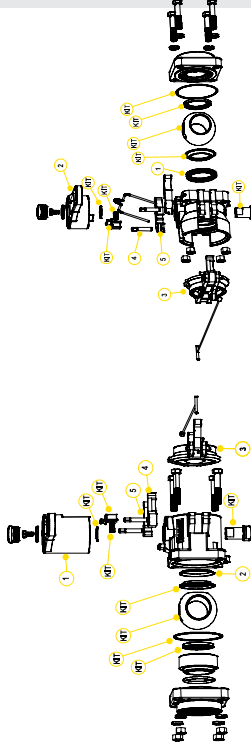

REPLACEMENT PARTS MALE

ITEM	PART NO	DESCRIPTION	QTY
1	DM20153M	MALE HANDLE	1
1	DB20153M	LOW PROFILE HANDLE	1
2	DB20295	FKM FACE SEAL	1
2	DB20295	EPDM FACE SEAL	1
2	DM20296	KALREZ® FACE SEAL	1
3	DM2000AP	DUST CAP	1
4	DM20300	PROFILE INSERT	2
5	200P	PIN	2
KIT	DM20200A	REPAIR KIT FOR DM200A & DM200AE	1

REPLACEMENT PARTS FEMALE


ITEM	PART NO	DESCRIPTION	QTY
1	DM20294A	FKM FACE SEAL	1
1	DM20295A	EPDM FACE SEAL	1
1	DM20296	KALREZ® FACE SEAL	1
2	DM20153F	FEMALE HANDLE	1
3	DM200PL	DUST PLUG	1
4	200P	PIN	2
5	DM200KX	CAM ARM	2
KIT	DM20200D	REPAIR KIT FOR DM200D & DM200DE	1

DRY DISCONNECTS

2" FULL PORT POLY DRY-MATES

FEATURES

- Lightweight
- Easy to use
- Economical
- Reduces risk of exposure
- Wide range of chemical resistance
- Unrestricted 2" flow
- Patented double ball design with cam lever connection
- When properly installed and operated, the assembly will not accidentally separate while fluid is flowing, preventing costly mishaps
- Spillage data: 2" FP = 3.6ml



REPAIR KIT INCLUDES:

- Body gasket
- Thrust washer
- Ball seats
- Upper stem bushing
- Stem o-ring
- Face seal




DM220D

DM220A

2" FULL PORT POLY DRY-MATES

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY
DM220D	2" FEMALE X FPT NPT W/FKM SEALS	225	2"	2"	1
DM220A	2" MALE X FPT W/FKM SEALS	225	2"	2"	1

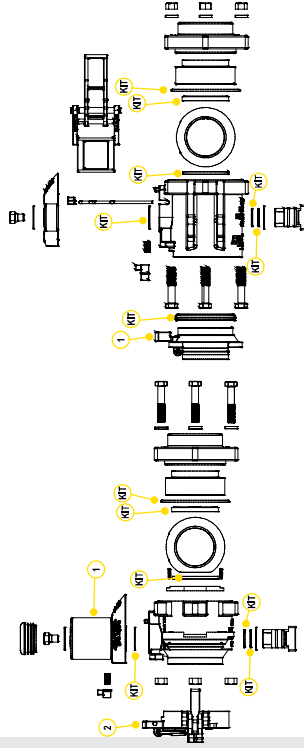

REPLACEMENT PARTS MALE

ITEM	PART NO	DESCRIPTION	QTY
1	DM25153M	MALE HANDLE	1
2	DM220CAP	DUST CAP	1
KIT	DM2500	REPAIR KIT	1

REPLACEMENT PARTS FEMALE


ITEM	PART NO	DESCRIPTION	QTY
1	DM25153F	FEMALE HANDLE	1
2	DM221PL	DUST PLUG	1
KIT	DM25200	REPAIR KIT	1

DRY DISCONNECTS

3" FULL PORT POLY DRY-MATES

FEATURES

- Lightweight
- Easy to use
- Economical
- Reduces risk of exposure
- Wide range of chemical resistance
- Unrestricted 3" flow
- Patented double ball design with cam lever connection
- When properly installed and operated, the assembly will not accidentally separate while fluid is flowing, preventing costly mishaps
- Spillage data: 3" = 20ml



REPAIR KIT INCLUDES:

- Ball
- Body gasket
- Thrust washer
- Ball seats
- Upper stem bushing
- Stem o-ring
- Face seal




DM300DFP

DM300AFP

3" FULL PORT POLY DRY-MATES

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY
DM300AFP	3" FP MALE X 3" FEMALE NPT THREADS W/ FKM SEALS	150	3"	3"	1
DM300DFP	3" FP FEMALE X 3" FEMALE NPT THREADS W/ FKM SEALS	150	3"	3"	1

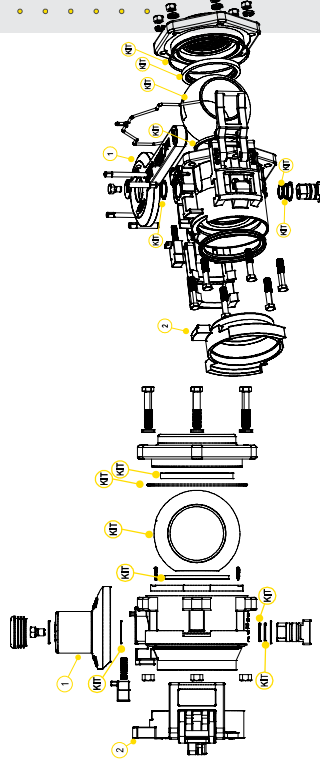

REPLACEMENT PARTS MALE

ITEM	PART NO	DESCRIPTION	QTY
1	DM35153M	MALE HANDLE	1
2	DM300CAP	DUST CAP	1
KIT	DM35200	REPAIR KIT	1

REPLACEMENT PARTS FEMALE


ITEM	PART NO	DESCRIPTION	QTY
1	DM35153F	FEMALE HANDLE	1
2	DM300PL	DUST PLUG	1
KIT	DM35200	REPAIR KIT	1

DRY DISCONNECTS

1" FULL PORT STAINLESS STEEL DRY-MATES

FEATURES

- 316 stainless steel construction
- Unrestricted 1" flow
- Patented double ball design with cam lever connection
- 300°F maximum operating temperature
- 100% PTFE ball seats
- When properly installed and operated, the assembly will not accidentally separate while fluid is flowing; preventing costly mishaps
- Spillage data: 1" FP = 1.7ml



REPAIR KIT INCLUDES:

- Ball
- Body gasket
- Thrust washer
- Ball seats
- Upper stem bushing
- Stem O-ring
- Face seal



DRY DISCONNECTS

1½" FULL PORT STAINLESS STEEL DRY-MATES

FEATURES

- 316 stainless steel construction
- Unrestricted 1½" flow
- Patented double ball design with cam lever connection
- 300°F maximum operating temperature
- 100% PTFE ball seats
- When properly installed and operated, the assembly will not accidentally separate while fluid is flowing; preventing costly mishaps
- Spillage data: 1½" FP = 3ml



REPAIR KIT INCLUDES:

- Ball
- Body gasket
- Thrust washer
- Ball seats
- Upper stem bushing
- Stem O-ring
- Face seal




DM100ASS

DM100DSS

1" FULL PORT STAINLESS STEEL DRY-MATE

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY
DM100ASS	1" MALE X FPT NPT W/ PTFE SEALS	150	1"	1"	1
DM100ABSS	1" MALE X BSPP W/ PTFE SEALS	150	1"	1"	1
DM100DSS	1" FEMALE X FPT NPT W/ FKM SEALS	150	1"	1"	1
DM100DSSE	1" FEMALE X FPT NPT W/ EPDM SEALS	150	1"	1"	1
DM100DBSS	1" FEMALE X BSPP W/ FKM SEALS	150	1"	1"	1

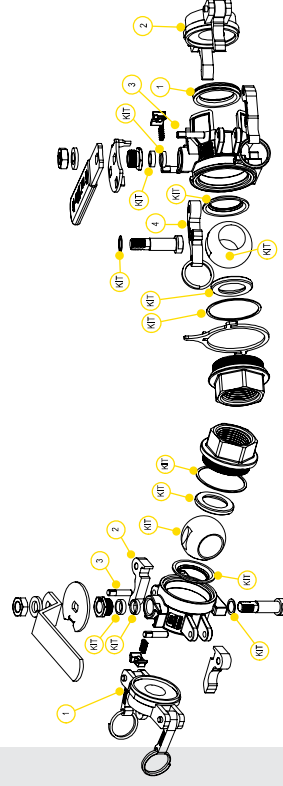

REPLACEMENT PARTS MALE

ITEM	PART NO	DESCRIPTION	QTY
1	DM100CAP	DUST CAP	1
2	DM10300	PROFILE INSERT	2
3	100P	PIN	2
KIT	DM101SS	REPAIR KIT	1

REPLACEMENT PARTS FEMALE

ITEM	PART NO	DESCRIPTION	QTY
1	DM10294A	FKM FACE SEAL	1
1	DM10295A	EPDM FACE SEAL	1
1	DM10296	KALREZ® FACE SEAL	1
2	DM100PL	POLY PLUG	1
3	100P	PIN	2
4	DM100K	CAM ARM	2
KIT	DM102SSV	FKM REPAIR KIT	1




DM150ASS

DM150DSS

1½" FULL PORT STAINLESS STEEL DRY-MATE

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY
DM150ASS	1½" MALE X FPT NPT W/ PTFE SEALS	150	1½"	1½"	1
DM150ABSS	1½" MALE X BSPP W/ PTFE SEALS	150	1½"	1½"	1
DM150DSS	1½" FEMALE X FPT NPT W/ FKM SEALS	150	1½"	1½"	1
DM150DSSE	1½" FEMALE X FPT NPT W/ EPDM SEALS	150	1½"	1½"	1
DM150DBSS	1½" FEMALE X BSPP W/ FKM SEALS	150	1½"	1½"	1

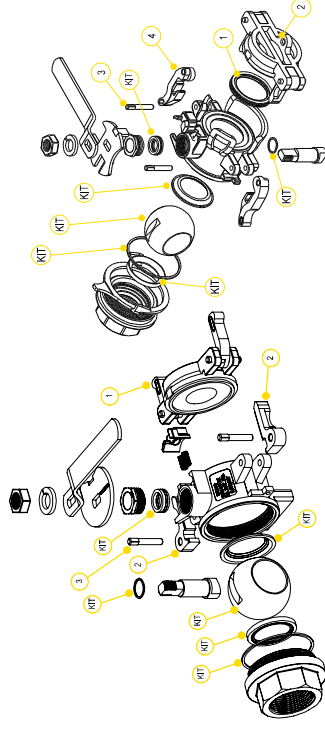

REPLACEMENT PARTS MALE

ITEM	PART NO	DESCRIPTION	QTY
1	DM200CAP	DUST CAP	1
2	DM20300	PROFILE INSERT	2
3	200P	PIN	2
KIT	DM201SS	REPAIR KIT	1

REPLACEMENT PARTS FEMALE


ITEM	PART NO	DESCRIPTION	QTY
1	DM20294A	FKM FACE SEAL	1
1	DM20295A	EPDM FACE SEAL	1
1	DM20296	KALREZ® FACE SEAL	1
2	DM200APL	DUST PLUG	1
3	200P	PIN	2
4	DM200KX	CAM ARM	2
KIT	DM202SSV	FKM REPAIR KIT	1

DRY DISCONNECTS

2" STAINLESS STEEL DRY-MATES

FEATURES

- 316 stainless steel construction
- Patented double ball design with cam lever connection
- 300°F maximum operating temperature
- 100% PTFE ball seats
- When properly installed and operated, the assembly will not accidentally separate while fluid is flowing; preventing costly mishaps
- Spillage data: 2" = 3.6ml



REPAIR KIT INCLUDES:

- Ball
- Body gasket
- Thrust washer
- Ball seats
- Upper stem bushing
- Stem O-ring
- Face seal




DRY DISCONNECTS

2" FULL PORT STAINLESS STEEL DRY-MATES

FEATURES

- 316 stainless steel construction
- Unrestricted 2" flow
- Patented double ball design with cam lever connection
- 300°F maximum operating temperature
- 100% PTFE ball seats
- When properly installed and operated, the assembly will not accidentally separate while fluid is flowing; preventing costly mishaps
- Spillage data: 2" = 3.8ml



REPAIR KIT INCLUDES:

- Body gasket
- Thrust washer
- Ball seats
- Upper stem bushing
- Stem O-ring




DM200ASS

DM200SSS


2" STANDARD PORT STAINLESS STEEL DRY-MATE

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY
DM200ASS	2" MALE X FPT NPT W/ PTFE SEALS	150	2"	1½"	1
DM200ABSS	2" MALE X BSPP W/ PTFE SEALS	150	2"	1½"	1
DM200DSSS	2" FEMALE X FPT NPT W/ FKM SEALS	150	2"	1½"	1
DM200DSST	2" FEMALE X FPT NPT W/ KALREZ® SEALS	150	2"	1½"	1
DM200DBSS	2" FEMALE X BSPP W/ FKM SEALS	150	2"	1½"	1



REPLACEMENT PARTS MALE

ITEM	PART NO	DESCRIPTION	QTY
1	DM200ACAP	DUST CAP	1
2	DM20300	PROFILE INSERT	2
3	DM20300	PIN	2
KIT	DM201SS	REPAIR KIT	1



REPLACEMENT PARTS FEMALE

ITEM	PART NO	DESCRIPTION	QTY
1	DM20294A	FKM FACE SEAL	1
1	DM20295A	EPDM FACE SEAL	1
1	DM20296	KALREZ® FACE SEAL	1
2	DM200APL	POLY PLUG	1
3	DM200P	PIN	2
4	DM200CA	CAM ARM	2
KIT	DM202SSV	FKM REPAIR KIT	1




DM220ABSS

DM220DBSS

2" FULL PORT STAINLESS STEEL DRY-MATE

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY
DM220ASS	2" FULL PORT MALE X FPT NPT W/ PTFE SEALS	300	2"	2"	1
DM220ABSS	2" FULL PORT MALE X BSPP W/ PTFE SEALS	300	2"	2"	1
DM220DSSS	2" FULL PORT FEMALE X FPT NPT W/ FKM SEALS	300	2"	2"	1
DM220DBSS	2" FULL PORT FEMALE X BSPP W/ FKM SEALS	300	2"	2"	1

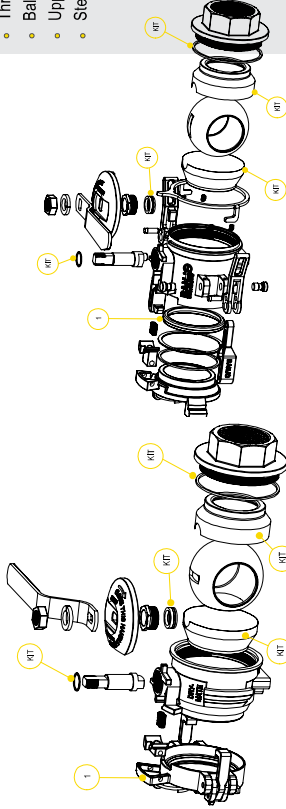

REPLACEMENT PARTS MALE

ITEM	PART NO	DESCRIPTION	QTY
1	DM220CAP	DUST CAP	1
KIT	DM221SS	REPAIR KIT	1

REPLACEMENT PARTS FEMALE

ITEM	PART NO	DESCRIPTION	QTY
1	DM22294	FKM FACE SEAL	1
1	DM22294IT	KALREZ® FACE SEAL	1
KIT	DM222SS	REPAIR KIT	1

DRY DISCONNECTS

1" POLY DRY FITS

FEATURES

- Double poly-ball valves with integrated quick disconnect
- 1" full-port (unrestricted flow)
- Allows higher pressures & flow
- Economical and simpler design without handle locking feature
- **90+ less spillage** vs. 2 standard valves connected via a coupling



1 1/2" POLY MALE DRY FIT™

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY
DF100A	1" MALE X FPT NPT W/FKM SEALS	100	1"	1"	1

1 1/2" POLY FEMALE DRY FIT™

PART NO	DESCRIPTION	MAX PSI	PIPE SIZE	OPENING THRU BALL	QTY
DF100D	1" FEMALE X FPT NPT W/FKM SEALS	100	1"	1"	1



DRY DISCONNECTS

DRY POPPET COUPLINGS

FEATURES

- Lightweight
- Minimal fluid spillage
- Easy to use
- Economical
- Reduces risk of exposure
- Wide range of chemical resistance
- Maximum operating temperature 150° F
- 30 GPM maximum flow
- Precision molded in polypropylene
- 1" female NPT threads

APPLICATIONS

- Agriculture
- Industrial
- Pharmaceutical
- Chemical processing



DPCF100



DPCM100



DPCMT100

PULL BACK TO DISCONNECT*



DRY POPPET COUPLINGS

PART NO	DESCRIPTION	MAX PSI	QTY
DPCF100	FEMALE DRY POPPET COUPLER, 1" FEMALE NPT THREADS W/ FKM SEALS	100	1
DPCM100	MALE DRY POPPET ADAPTER, 1" FEMALE NPT THREADS W/ FKM SEALS	150	1
DPCMT100	MALE DRY POPPET ADAPTER, 1/2" MALE THREADED BODY 1" FEMALE NPT THREADS W/ FKM SEALS	150	1

*Note: Male adapter and female coupler shown coupled together but sold separately.