






## BRONZE GEARS

## 12V and 24V - DC

## UP2/OIL



12V  
24V

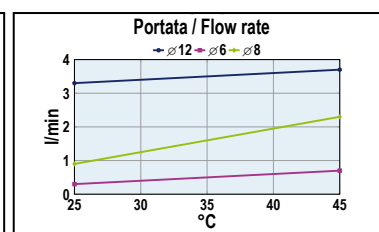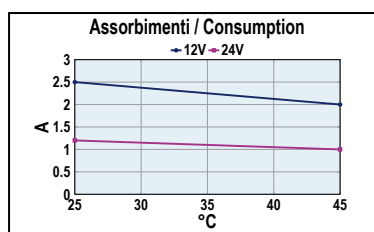

PORTATA\*  
FLOW RATE\*  
max.

3,3 l/min  
0.9 gpm

PRESSIONE  
PRESSURE  
max.

2 bar  
29 psi

\* OIL SAE 30 AT 25°C

CODICE  
PART NUMBER

VOLTS

ADESCAM.  
SELF-PRIM.  
m

CONS.

MOTORE  
MOTOR

FUSIBILE  
FUSE

TUBO  
TUBE

BOCCHE  
PORTS

PESO  
WEIGHT

164 220 12

12

1

2,5A

90W

3A

12 mm

3/8" BSPP 1,2 kg

164 220 13

24

1

1,3A

90W

1,5A




12 mm

3/8" BSPP 1,2 kg

## UP3/OIL



12V  
24V

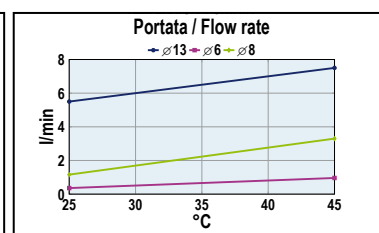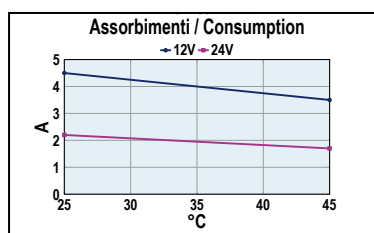

PORTATA\*  
FLOW RATE\*  
max.

5,5 l/min  
1.5 gpm

PRESSIONE  
PRESSURE  
max.

2 bar  
29 psi

\* OIL SAE 30 AT 25°C

CODICE  
PART NUMBER

VOLTS

ADESCAM.  
SELF-PRIM.  
m

CONS.

MOTORE  
MOTOR

FUSIBILE  
FUSE

TUBO  
TUBE

BOCCHE  
PORTS

PESO  
WEIGHT

164 020 12

12

1

5A

90W

7,5A

13 mm

3/8" BSPP 1,4 kg

164 020 13

24

1

3A

90W

4A

13 mm

3/8" BSPP 1,4 kg




## UP3/OIL-R



On/Off 3 positions  
reversing switch



12V  
24V

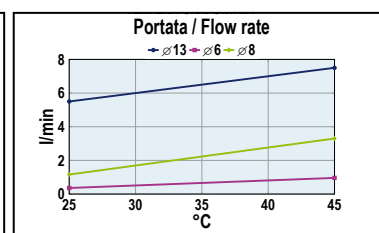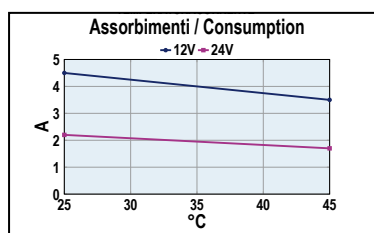

PORTATA\*  
FLOW RATE\*  
max.

5,5 l/min  
1.5 gpm

PRESSIONE  
PRESSURE  
max.

2 bar  
29 psi

\* OIL SAE 30 AT 25°C

CODICE  
PART NUMBER

VOLTS

ADESCAM.  
SELF-PRIM.  
m

CONS.

MOTORE  
MOTOR

FUSIBILE  
FUSE

TUBO  
TUBE

BOCCHE  
PORTS

PESO  
WEIGHT

164 022 12

12

1

5A

90W

7,5A

13 mm

3/8" BSPP 1,8 kg

164 022 13

24

1

3A

90W

4A

13 mm

3/8" BSPP 1,8 kg